

Trixbox Configuration

1. Go to Extensions -> Add Extension -> select Generic SIP device -> Submit ->

<ul style="list-style-type: none"> Setup Tools Admin System Status Module Admin Basic Administrators Extensions Feature Codes General Settings Outbound Routes 	<p>Admin Reports Panel Recordings Help</p> <p>English</p> <h3>Add an Extension</h3> <p>Please select your Device below then click Submit</p> <p>Device</p> <hr/> <p>Device <input type="text" value="Generic SIP Device"/></p> <p><input type="button" value="Submit"/></p>	<p>Add Extension</p> <p>Extension 1 <2</p> <p>Extension 2 <2</p> <p>Extension 3 <2</p> <p>Extension 4 <2</p> <p>Extension 5 <2</p>
--	---	---


User extension (this number is internal for your * , you can select whatever suits you) -> Display name (in case you call other sip users this name will appear when you call them) -> Secret -> SIP password for this account -> Submit

<ul style="list-style-type: none"> Administrators Extensions Feature Codes General Settings Outbound Routes Trunks Inbound Call Control Inbound Routes Zap Channel DIDs Announcements Day/Night Control Follow Me IVR Queues Ring Groups Time Conditions Internal Options & Configuration Conferences Languages Music on Hold Paging and Intercom Parking Lot System Recordings 	<p>User Extension <input type="text" value="2000"/></p> <p>Display Name <input type="text" value="Test"/></p> <p>CID Num Alias <input type="text"/></p> <p>SIP Alias <input type="text"/></p> <p>Extension Options</p> <hr/> <p>Direct DID <input type="text"/></p> <p>DID Alert Info <input type="text"/></p> <p>Music on Hold <input type="text" value="default"/></p> <p>Outbound CID <input type="text"/></p> <p>Ring Time <input type="text" value="Default"/></p> <p>Call Waiting <input type="text" value="Enable"/></p> <p>Emergency CID <input type="text"/></p> <p>Device Options</p> <hr/> <p>This device uses sip technology.</p> <p>secret <input type="text" value="2000"/></p> <p>dtmfmode <input type="text" value="rfc2833"/></p>
---	--

This way you can create all extensions you need to connect to your Tribox

2. Go to Trunks -> Add SIP Trunk -> Outbound Caller ID

(this will appear when you dial out thru Nomado other sip peers, it might be your company name or whatever suits you) ->Maximum channels - the Nomado trunk might be used simulatenously for more then one concurrent call. The maximum is depends on your Internet connection load -> In Outgoing Settings section,

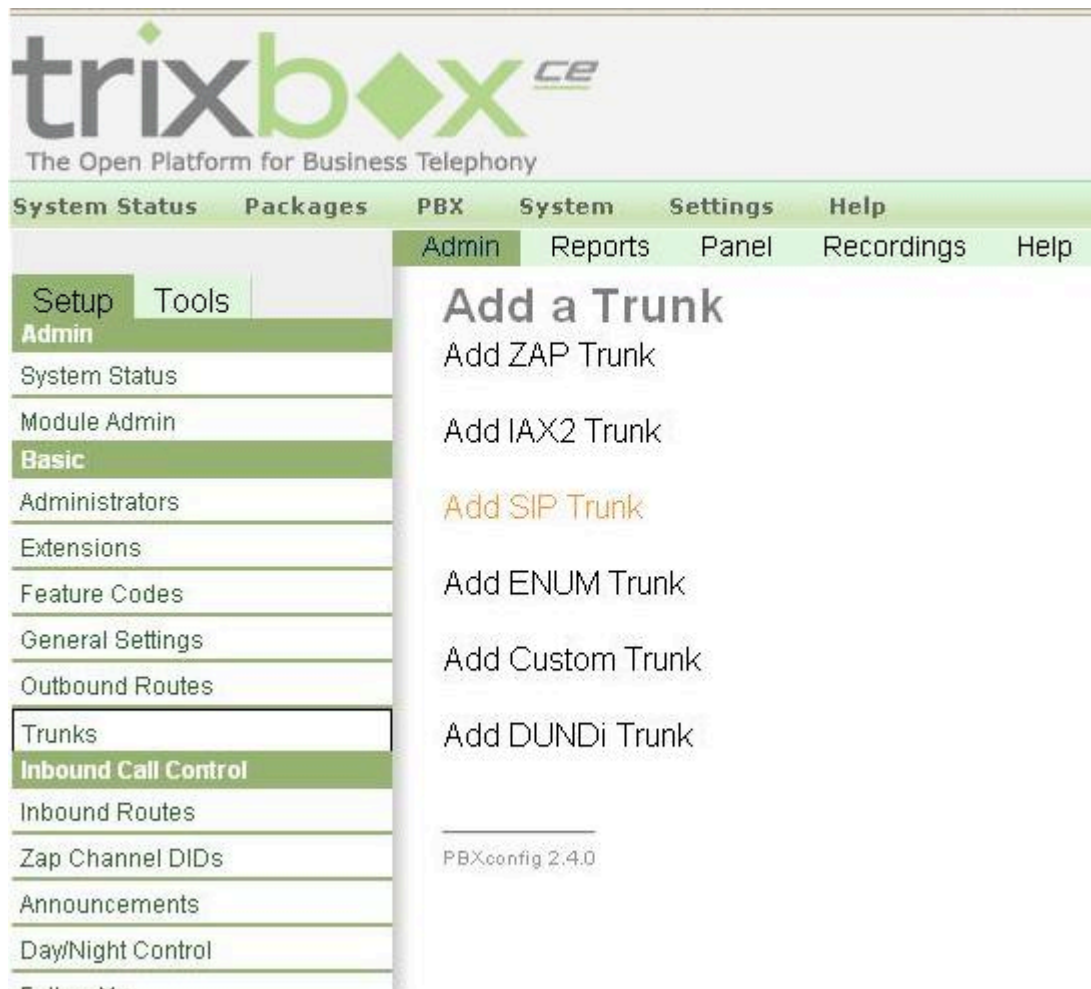

Trunk name (for example Nomadout)

under PEER Details, enter:

```

fromdomain=sip.nomado.eu
fromuser=your SIP username from Nomado welcome email
secret=your SIP password from Nomado welcome email
username=your SIP username from Nomado welcome email
host= sip.nomado.eu
nat=yes
type=peer

```

Conferences	Dial Rules Wizards: (pick one)
Languages	Outbound Dial Prefix:
Music on Hold	
Paging and Intercom	Outgoing Settings
Parking Lot	Trunk Name: Nomadoout
System Recordings	PEER Details:
	<pre>fromdomain= sip.nomado.eu fromuser= SIP username from welcome email host= sip.nomado.eu nat=yes secret= SIP password from welcome email type=peer username= SIP username from welcome email</pre>

In Registration section, under Register String, enter:

XXXXXXXX:YYYYYY@sip.nomado.eu

where XXXXXXXX is your SIP username from Nomado welcome email,
and YYYYYY is your SIP password from Nomado welcome email

Registration

Register String:

XXXXXXXX:YYYYYY @sip.nomado.eu

Submit Changes

PBXconfig 2.4.0

After all is set, click Submit changes

2. Go to Outbound Routes -> ADD Route -> Route name: Nomado -> under Dial Pattern enter X.
-> Under Trunk Sequence select SIP/Nomado -> Submit changes

Admin Reports Panel Recordings Help

Setup Tools

Admin

System Status

Module Admin

Basic

Administrators

Extensions

Feature Codes

General Settings

Outbound Routes

Trunks

Inbound Call Control

Inbound Routes

Zap Channel DIDs

Announcements

Day/Night Control

Follow Me

IVR

Queues

Add Route

Route Name:

Route Password:

Emergency Dialing:

Intra Company Route:

Music On Hold?

Dial Patterns

Dial patterns wizards:

Trunk Sequence

After those 3 steps are done, click orange button Apply Configuration Changes, and your Trixbox is ready to work with Nomado

